



Select Your Region: United States

TOLL FREE: 800-466-1467

[Customer Login](#)

- MENU**
- HOME
- CATALOG
- COMPANY INFO
- TECHNICAL DATA
- CAPABILITIES
- CONTACT US
- DISTRIBUTORS
- ISO INFO
- ROHS INFO
- CUSTOMERS



ABOUT SSL CERTIFICATES

Browse Search Results for 'NT16025C'

[Search](#)
[Need Help?](#)

Select Product Family [Wiring Accessories and Cable Ties](#)



Select Product Category [Cable Ties](#)


View Item Detail - 2 Items Found

Cable Ties



Manufactured from tough, durable Nylon 6/6 material which is self extinguishing to U.L. 94V2. The Nylon is inert to fungus or mold and is resistant to petrols, oil, grease and alkalis, etc.

Ties can be tensioned by hand or by the use of applied tensioning tools.

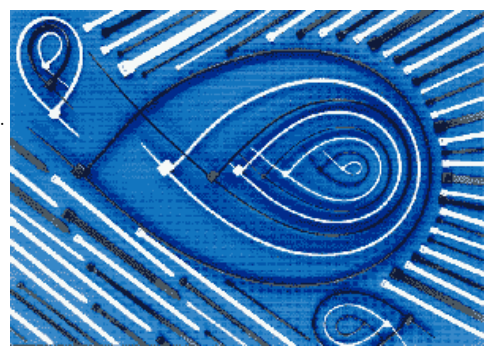

U.L. FILE #E97707

NOTE: NT15076C AND NT15076CB ARE NOT U.L. REGOGNIZED

Item Number	Description	Package Qty	Tensile Strength	Length	Width	Max. Dia.	Material
NT16025C	Nylon 6/6 Natural	100	{0:n0} lbs.	6.500* (ref.)	0.098 (+/- 0.005)	1.730 (+/- 0.015)	Nylon 6/6 Natural
NT16025CB	Nylon 6/6 UV Black	100	{0:n0} lbs.	6.500* (ref.)	0.098 (+/- 0.005)	1.730 (+/- 0.015)	Nylon 6/6 UV Black

Show Dimension Tolerances

Tensile strength at 73 deg. F. dry as molded.

All Cable Ties are packaged 100 pcs. Per bag.

For a full description of the nylon material used go to our [specifications page](#).

[HOME](#) : [CATALOG](#) : FULL CATALOG